

# Technical Datasheet

## Condensation on glass


*Windows manufactured using a low-E glass such as the SGG PLANITHERM range, actually restrict heat loss. This keeps the inner pane of glass warmer thus reducing the instances when condensation can form.*

### What is condensation?

Condensation is defined as the physical process by which a gas or vapour changes into a liquid. If the temperature of an object (e.g. grass, metal, glass) falls below what is known as the 'Dew Point' temperature for a given relative humidity of the surrounding air, water vapour from the atmosphere condenses into water droplets on its surface. This "dew point" varies according to the amount of water in the atmosphere (known as humidity). In humid conditions condensation occurs at higher temperatures. In cold conditions condensation occurs despite relatively low humidity.

### Condensation on glass

Condensation on the outer surfaces of an insulating glass unit (IGU) can form in a wide variety of circumstances and on either the inside or the outside of a building.




The phenomenon of surface condensation on insulating glass units occurs in three forms:

- On the external face (face 1)
- On the internal face (face 4)
- On the inner faces of the insulating glass unit

### Outdoor condensation

Condensation forms on the outdoor surface of glass when its temperature drops below the outdoor dew point temperature.

Again, windows manufactured with an insulating glass unit containing energy efficient low-emissivity glass such as the SGG PLANITHERM range, have enhanced thermal insulation properties thanks to a high performance transparent coating that reflects heat from radiators or fires back into the room. As a result, the outer pane of glass does not get warmed by heat escaping from inside the building through the glass and remains cooler in comparison to less thermally efficient windows.




*Condensation on the exterior face of an IGU.*

External condensation only occurs in certain climatic conditions with high humidity levels and/or particularly cold weather. It is possible that external condensation will appear on some windows but not on others. This is due to localised atmospheric conditions such as shelter from nearby trees or buildings, variable air currents and wind speeds and varying levels of nearby vegetation.

Condensation on the outdoor surface of such high performance windows is in no way an indication of a defective unit. Indeed, this can be seen as a positive indication that the enhanced thermally insulating units are actively reducing heat loss through the windows.

This form of condensation can be counteracted through the use of a hydrophilic coating such as SGG BIOCLEAR. Traditionally a self-cleaning glass, SGG BIOCLEAR attracts water across the surface in a "sheeting" effect allowing clear vision through glass that is susceptible to external condensation.

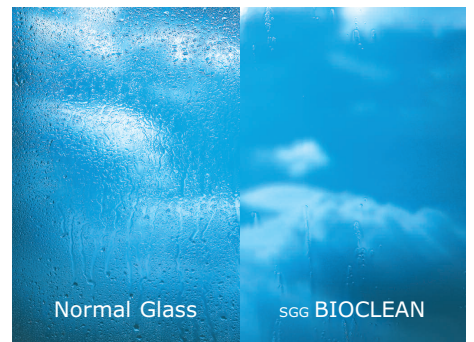

## Indoor condensation

The principal cause of condensation on glass on the inside of a building is a high internal humidity level coupled with a low outside temperature which cools the inside surface to below the dew point, particularly around the edges. Bathrooms, kitchens and other areas where humidity levels are high are particularly susceptible to this problem.



*Condensation on the interior face of an IGU.*

In order to control this form of condensation, consideration should be given to improving the heating and ventilation in these areas. However, another way to reduce the problem is to use high performance windows containing an enhanced thermally insulating glass.

Windows manufactured using an energy efficient low-emissivity (or low-E) glass such as the SGG PLANITHERM range, actually restrict heat exchange across the cavity between the two panes of glass. This keeps the inner pane of glass warmer thus reducing the instances when condensation can form. In addition, the use of a "warm-edge" spacer bar made of insulating material, such as SGG SWISSPACER, will reduce the risk of condensation around the edges.

## Condensation on inner faces

The formation of condensation on the inner faces of the insulating glass unit is an indication that the air or gas cavity is no longer completely sealed. The desiccant will rapidly become saturated and any damp air penetrating via the seal around the perimeter will reduce visibility by forming condensation on faces 2 and 3. The insulating glass unit must therefore be replaced as this cannot be reversed. This IGU unit may be replaced in accordance with the terms and conditions of the warranty.

## In summary

- External condensation:
  - can occur in certain climatic conditions with high humidity levels and/or particularly cold weather
  - is a positive indication that the enhanced thermally insulating units are working correctly and reducing heat loss through the windows
  - can be counteracted by the use of a hydrophilic coating such as SGG BIOCLEAR self-cleaning glass.
- Internal condensation:
  - can occur in areas of high humidity (e.g. bathrooms and kitchens) and/or during exceptionally cold weather
  - can be reduced on windows by using high performance thermally insulating glass, such as the SGG PLANITHERM range.
- Condensation on the inner faces of an insulating glass unit:
  - is not normal and is an indication that the cavity is no longer completely sealed
  - the unit must be replaced as this cannot be reversed.

SGG BIOCLEAR, SGG PLANITHERM, SGG and all other devices and logos are registered trademarks of Saint-Gobain.

**SAINT-GOBAIN  
GLASS**

Saint-Gobain Glass UK Ltd  
Weeland Road, Eggborough  
East Riding of Yorkshire, DN14 0FD, UK  
[www.saint-gobain-glass.com](http://www.saint-gobain-glass.com)

Distributor